

Rotary Joint

5000N Series

Media Type
Hydraulic Oil

Max. Speed
1500 RPM

Max. Pressure
400 BAR

Max. Temperature
90 °C

Connection Type
**BSPP, BSPT, NPT, FL,
Metric**

Rotor Size
**1/8" DN06 - 1 1/2"
DN40**




- ✓ Single flow design
- ✓ Balanced mechanical sealing
- ✓ Double way ball bearing (No lubricate)
- ✓ Drainage holes
- ✓ Stainless steel back cover & shaft
- ✓ Threaded connection (BSP, BSPP, NPT)

Rotary joint for high speed hydraulic applications

! Do not operate without fluid.

DIMENSIONS

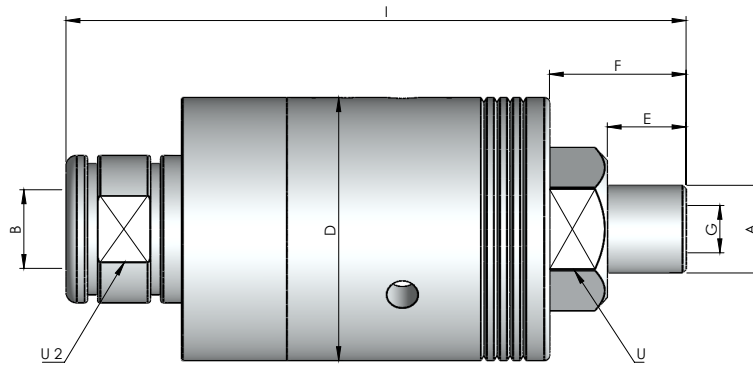

BOYUT	B	MODEL NO	A	DØ	I	E	F	GØ	U	U 2	KG
6	1/8" BSPP	N5010-244-200	1/8" BSPP - RH	42	97,50	15	26	3,18	22	27	0,55
6	1/8" BSPP	N5010-244-201	1/8" BSPP - LH	42	97,50	15	26	3,18	22	27	0,55
8	1/4" BSPP	N5025-244-202	1/4" BSPP - RH	42	97,50	15	26	6,40	22	27	0,53
8	1/4" BSPP	N5025-244-203	1/4" BSPP - LH	42	97,50	15	26	6,40	22	27	0,53
10	3/8" BSPP	N5037-244-204	3/8" BSPP - RH	50	118	15	26	9	27	25	1
10	3/8" BSPP	N5037-244-205	3/8" BSPP - LH	50	118	15	26	9	27	25	1
15	1/2" BSPP	N5050-244-206	1/2" BSPP - RH	64	137	15	36	12	30	25	2
15	1/2" BSPP	N5050-244-207	1/2" BSPP - LH	64	137	15	36	12	30	25	2
20	3/4" BSPP	N5075-244-208	3/4" BSPP - RH	84	159	24	43	18	48	41	3,85
20	3/4" BSPP	N5075-244-209	3/4" BSPP - LH	84	159	24	43	18	48	41	3,85
25	1" BSPP	N5100-244-210	1" BSPP - RH	94	160	25	44,50	24	48	41	4,30
25	1" BSPP	N5100-244-211	1" BSPP - LH	94	160	25	44,50	24	48	41	4,30