

Rotary Joint

9000T-T2 Series



Media Type

Steam



Max. Speed

350 RPM



Max. Pressure

20 BAR



Max. Temperature

260 °C




Connection Type

**BSPP, BSPT, NPT, FL,
Metric**



Rotor Size

1/2" DN15 - 4" DN100

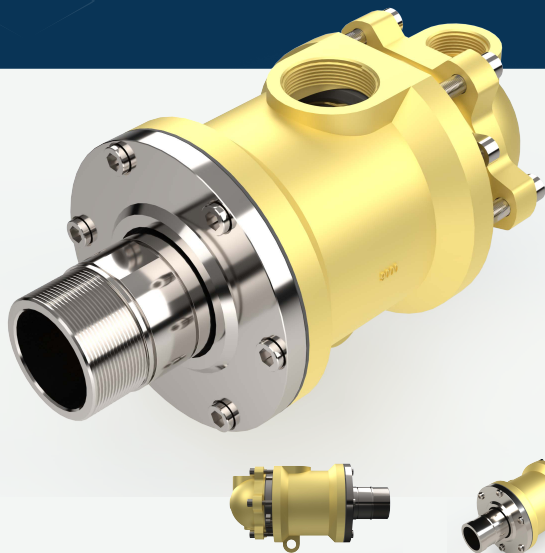


Rotary Joint for steam

- ✓ Single & duoflow design
- ✓ Nodular casting housing
- ✓ Stainless steel shaft and inner components
- ✓ Carbon Graphite sealing parts
- ✓ Stationary or rotating siphon system
- ✓ Threaded, Qr & flanged connection



Do not operate without fluid.

DIMENSIONS

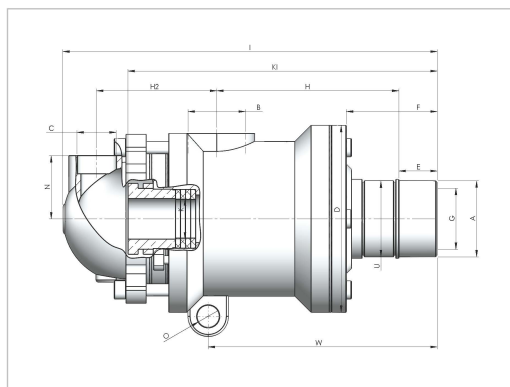

SIZE	B	MODEL NO	A	D	I	E	F	GØ	H	H2	W	U	OØ	LØ	S	T	KG
15	1/2" NPT	T9050-2105-0504-106	1/2" NPT - RH	80	193	18	50	13	99,5	62	102	22	10				2,50
15	1/2" NPT	T9050-2105-0504-107	1/2" NPT - LH	80	193	18	50	13	99,5	62	102	22	10				2,50
15	1/2" NPT	T9050-2105-0504-70	Ø24	80	193		50	13	99,5	62	102		10	22	6	11	2,50
15	1/2" BSP	T9050-2205-0504-206	1/2" BSP - RH	80	193	18	50	13	99,5	62	102	22	10				2,50
15	1/2" BSP	T9050-2205-0504-207	1/2" BSP - RH	80	193	18	50	13	99,5	62	102	22	10	22	6	11	2,50
15	1/2" BSP	T9050-2205-0504-70	Ø24	80	193		50	13	99,5	62	102		10				2,50
20	3/4" NPT	T9070-2107-0504-108	3/4" NPT - RH	87	196,5	20	45	18	99,5	62	121	27	10				3,20
20	3/4" NPT	T9070-2107-0504-109	3/4" NPT - LH	87	196,5	20	45	18	99,5	65	121	27	10				3,20
20	3/4" NPT	S9070-2107-0000-70	Ø30	87	196,5		45	18	99,5	65	121		10	28	8	13	3,20
20	3/4" BSP	T9070-2207-0504-208	3/4" BSP - RH	87	196,5	20	45	18	99,5	65	121	27	10				3,20
20	3/4" BSP	T9070-2207-0504-209	3/4" BSP - RH	87	196,5	20	45	18	99,5	65	121	27	10	28	8	13	3,20
20	3/4" BSP	T9070-2207-0504-70	Ø30	87	196,5		45	18	99,5	65	121		10				3,20



25	1" NPT	T9100-2107-0303-110	1" NPT - RH	108	220	22	50	25	107	72	137,5	32	10				5
25	1" NPT	T9100-2107-0303-111	1" NPT - LH	108	220	22	50	25	107	72	137,5	32	10				5
25	1" NPT	T9100-2107-0303-70	Ø35	108	220		50	25	107	72	137,5		10	33	8	13	5
25	1" BSP	T9100-2207-0303-210	1" BSP - RH	108	220	22	50	25	107	72	137,5	32	10				5
25	1" BSP	T9100-2207-0303-211	1" BSP - RH	108	220	22	50	25	107	72	137,5	32	10	33	8	13	5
25	1" BSP	T9100-2207-0303-70	Ø35	108	220		50	25	107	72	137,5		10				5
32	1 1/4" NPT	T9120-2110-1005-112	1 1/4" NPT - RH	116	228	25	55	32	118	76	150,5	41	14				6,50
32	1 1/4" NPT	T9120-2110-1005-113	1 1/4" NPT - LH	116	228	25	55	32	118	76	150,5	41	14				6,50
32	1 1/4" NPT	T9120-2110-1005-70	Ø45	116	228		55	32	118	76	150,5		14	43	8	17	6,50
32	1 1/4" BSP	T9120-2210-1005-212	1 1/4" BSP - RH	116	228	25	55	32	118	76	150,5	41	14				6,50
32	1 1/4" BSP	T9120-2210-1005-213	1 1/4" BSP - RH	116	228	25	55	32	118	76	150,5	41	14	43	8	17	6,50
32	1 1/4" BSP	T9120-2210-1005-70	Ø45	116	228		55	32	118	76	150,5		14				6,50
40	1 1/2" NPT	T9150-2112-1007-114	1 1/2" NPT - RH	152	208	27	60	38	105,5	89	170,5	50	18				11,65
40	1 1/2" NPT	T9150-2112-1007-115	1 1/2" NPT - LH	152	278	27	60	38	105,5	89	170,5	50	18				11,65
40	1 1/2" NPT	T9150-2112-1007-70	Ø50	152	27		60	38	105,5	89	170,5		18	48	10	16	11,65
40	1 1/2" BSP	T9150-2212-1007-214	1 1/2" BSP - RH	152	278	27	60	38	105,5	89	170,5	50	18				11,65
40	1 1/2" BSP	T9150-2212-1007-215	1 1/2" BSP - RH	152	278	27	60	38	105,5	89	170,5	50	18				11,65
40	1 1/2" BSP	T9150-2212-1007-70	Ø50	152	278		60	38	106,5	89	170,5		18	48	10	16	11,65
50	2" NPT	T9200-2115-1210-116	2" NPT - RH	162	314	30	70	49	150	102	194,5	60	18				15
50	2" NPT	T9200-2115-1210-117	2" NPT - LH	162	314	30	70	49	150	102	194,5	60	18				15
50	2" NPT	T9200-2115-1210-70	Ø65	162	314		70	49	150	102	194,5		18	63	10	16	15
50	2" BSP	T9200-2215-1210-216	2" BSP - RH	162	314	30	70	49	150	102	194,5	60	18				15
50	2" BSP	T9200-2215-1210-217	2" BSP - RH	162	314	30	70	49	150	102	194,5	60	18				15
50	2" BSP	T9200-2215-1210-70	Ø65	162	314		70	49	150	102	194,5		18	63	10	16	15
65	2 1/2" NPT	T9250-2125-1520-118	2 1/2" NPT - RH	185	371	38	90	60,50	180,5	119	227	75	22				25
65	2 1/2" NPT	T9250-2125-1520-119	2 1/2" NPT - LH	185	371	38	90	60,50	180,5	119	227	75	22				25
65	2 1/2" NPT	T9250-2125-1520-70	Ø65	185	371		90	60,50	180,5	119	227		22	72	10	18	25
65	2 1/2" BSP	T9250-2225-1520-218	2 1/2" BSP - RH	185	371	38	90	60,50	180,5	119	227	75	22				25
65	2 1/2" BSP	T9250-2225-1520-219	2 1/2" BSP - RH	185	371	38	90	60,50	180,5	119	227	75	22				25
65	2 1/2" BSP	T9250-2225-1520-70	Ø65	185	371		90	60,50	180,5	119	227		22	72	10	18	25
80	3" NPT	T9300-2120-2015-120	3" NPT - RH	200	403	32	96	73	193	128,5	245,5	85	28				34
80	3" NPT	T9300-2120-2015-121	3" NPT - LH	200	403	32	96	73	193	128,5	245,5	85	28				34
80	3" NPT	T9300-2120-2015-70	Ø87,3	200	403		96	73	193	128,5	245,5		28	84	22	31	34
80	3" BSP	T9300-2220-2015-220	3" BSP - RH	200	403	32	96	73	193	128,5	245,5	85	28				34
80	3" BSP	T9300-2220-2015-221	3" BSP - RH	200	403	32	96	73	193	128,5	245,5	85	28				34
80	3" BSP	T9300-2220-2015-70	Ø87,3	200	403		96	73	193	128,5	245,5		28	84	22	31	34
100	4" NPT	T9400-2130-2520-124	4" NPT - RH	257	499	40	120	98	254	155	311	115	28				100,7
100	4" NPT	T9400-2130-2520-125	4" NPT - LH	257	499	40	120	98	254	155	311	115	28				100,7
100	4" NPT	T9400-2130-2520-70	Ø114	257	499		120	98	254	155	311		28	110	12	22	100,7
100	4" BSP	T9400-2230-2520-224	4" BSP - RH	257	499	40	120	98	254	155	311	115	28				100,7
100	4" BSP	T9400-2230-2520-225	4" BSP - RH	257	499	40	120	98	254	155	311	115	28				100,7
100	4" BSP	T9400-2230-2520-70	Ø114	257	499		120	98	254	155	311		28	110	12	22	100,7