

Rotary Joint

1000A-T2 Series



Media Type

Water + General Purpose



Max. Speed

100 RPM



Max. Pressure

10 BAR



Max. Temperature

120 °C




Connection Type

BSP, BSPP, NPT



Rotor Size

1/2" DN15 - 1" DN25

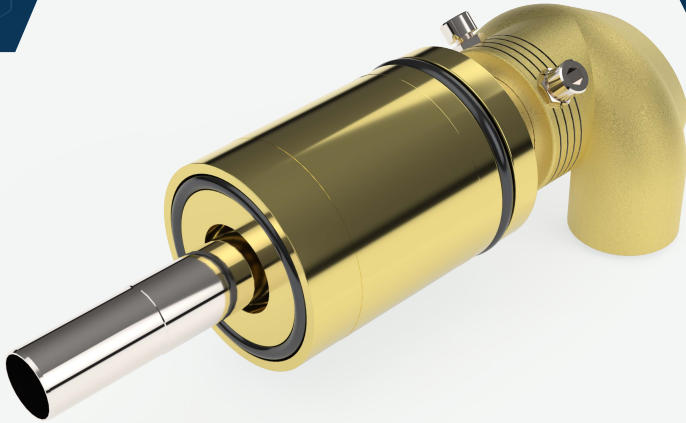


- ✓ Single or Dual flow
- ✓ In-the-shaft mounted
- ✓ Stainless steel shaft
- ✓ Bronze bearing and teflon+viton o-ring seal kit
- ✓ Forging brass body
- ✓ Easy assembling

For CCM lines water rotary joints



Do not operate without fluid.

DIMENSIONS

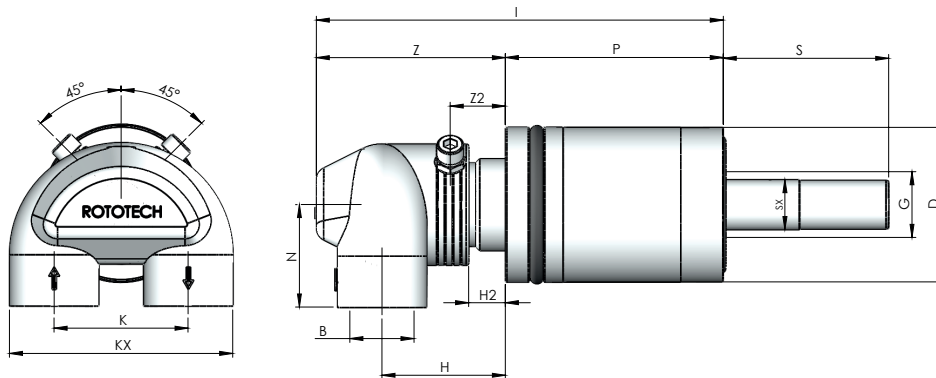

SIZE	MODEL NO	B	Z	Z2	P	DØ	I	H	H2	GØ	N	K	KX	S	SXØ	KG
15	1053-1200-101	1/2" NPT	58	15	52	43	110	37	9	17,50	35	44	73	40	13	1,05
15	1054-1200-101	1/2" BSP	58	15	52	43	110	37	9	17,50	35	44	73	40	13	1,05
20	1073-1200-101	3/4" NPT	71	20	65	46,20	135	46	13	17,50	39	51	85	50	13	1,75
20	1074-1200-101	3/4" BSP	71	20	65	46,20	135	46	13	17,50	39	51	85	50	13	1,75
20	1073-1400-201	3/4" NPT	72	21	83	58,85	155	47	14	25	39	51	85	63	19	2,40
20	1074-1400-201	3/4" BSP	72	21	83	58,85	155	47	14	25	39	51	85	63	19	2,40
25	1103-1500-301	1" NPT	94	21,50	92	71,10	186	63	14	39	43	63,50	105,50	50	30	3,50
25	1104-1500-301	1" BSP	94	21,50	92	71,10	186	63	14	39	43	63,50	105,50	50	30	3,50